


# SERIES FMVCLVDSC3S

3.3 Vdc LVDS VCXO

CERAMIC SMD 5x7

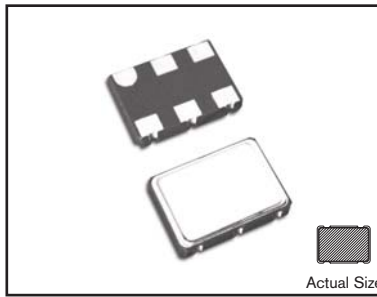

- Miniature, Low Profile
- 3.3 Vdc Supply Voltage
- LVDS
- Low Current Consumption



## SPECIFICATIONS

09 - Issue 2 - 021209

Parameter	Specification
Frequency Range	10.000 to 650.000 MHz
Overall Frequency Tolerance	±20 ppm to ±100 ppm (Inclusive of Operating Temp., Supply Voltage, & Load)
Operating Temperature Range	0 to +70°C Std., -40 to +85°C Avail.
Storage Temperature	-55 to +125°C
Supply Voltage (Vdd)	+3.3 Vdc ± 5%
Supply Current (Icc)	80 mA Typical
Phase Jitter (Tpj)	0.044 x 10 <sup>-3</sup> Typical
Phase Jitter (Tp-p)	3 pS RMS max.   Condition: 12 kHz to 20 MHz
Accumulated Jitter (Tacc)	3 pS RMS max.   Condition: 12 kHz to 20 MHz
Symmetry (Duty Cycle)	45/55%
Rise and Fall Time	500 ps Typ. / 800 ps max.
Start Time	10 ms max. < 5 ms typical
Output	LVDS
Output Load	100 ohms max. (Vcc - 2.0V)
Differential Output Voltage	0.247V to 0.454V
(Vod) (Out 1 - Out 2)	(0.33V Typical)
Offset Voltage	1.25 Vos
Pin 1 Options (See Spec. Option T below)	No Connect (Std.) Tri-State (option T) VIH: 1.6 V max. or Open Enables Output VIL: 0.9 V min. Disables Output Output Disable/Enable Time: 100 nS max.
Aging @ 25°C	±5ppm max first year

All specifications subject to change without notice.

### STANDARD MARKING






XXX.XXXM FREQUENCY in MHz  
Pin 1 Symbol, FMI, Date Code


### PIN FUNCTION TABLE

Pin	Function
1	Control V
2	Tri-State Control
3	Ground (Case)
4	Output
5	Diff. Output
6	Supply Voltage (Vdd)

### CERAMIC SMD



### Bottom View



### Soldering Position

Standard Specifications for product indicated in color

Dimensions:  $\frac{\text{Inches}}{\text{(mm)}}$

## PART DESCRIPTION SYSTEM

