


# S83

**SERIES - 100 krad (Si) TID  
Element Evaluation MIL-PRF-38534, Class K**

Crystal Oscillator | 3.3V | CMOS | Space Grade | 5x7mm Ceramic J-Lead



5x7 mm Ceramic J-Lead Package



## Features

- Ruggedized Design
- Shortest Lead Time
- Best Stability Over Temperature
- High-Shock & Vibration
- Small Hi-Rel Package
- Customer Support & Service
- Industry Standard Package
- ECCN - EAR 99
- See S84 Datasheet for 5.0V Operation
- Robust, Rugged, High Shock Crystal Support (3 or 4 point Crystal Mount)

## Electrical SPECIFICATIONS

EM	Dash Number		Frequency Range (MHz)	Supply Current @ 5.0V ±10% (mA)	Rise/Fall Time (tr/tf) max (nsec)	Symmetry min / max (%)	Aging per year max 1/ (ppm)	Stability over Operating Temperature Range			
	EQM	FM						-55°C to +125°C (ppm)	-55°C to +125°C (ppm)	-40°C to +85°C (ppm)	-20°C to +70°C (ppm)
CODE	CODE	CODE						CODE A	CODE B	CODE C	CODE D
01	02	03	0.25 to 0.9	6	3	48/52	±10	±50	±65	±40	±30
04	05	06	1 to 7.9	6	3	48/52	±10	±50	±65	±40	±30
07	08	09	8 to 15.9	10	3	45/55	±10	±50	±65	±40	±30
11	12	13	16 to 49.9	15	3	45/55	±10	±50	±65	±40	±30
14	15	16	50 to 64.9	15	2	40/60	±10	±50	±65	±40	±30
17	18	19	65 to 84.9	27	2	40/60	±10	±50	±65	±40	±30
21	22	23	85 to 135	27	2	40/60	±10	±50	±65	±40	±30

Please Contact Us for Specification Options that are Outside of or beyond those Shown in the Table Above

**CMOS Output, 10 kΩ || 15 pF Load**  
 Output Voltage - Logic "0" is Vcc x 0.1 Vdc  
 Output Voltage - Logic "1" is Vcc is 0.9 Vdc  
 Start-up Time: 10 msec max

### 1/ Frequency Aging Limits

Max change over 30 days	±1.5 ppm
Max change over 90 days	±3 ppm


### Standard MODEL TYPES

Model	Description
EM: Engineering Models	Same as FM, not with Class K radiation tolerant die commercial screening only
EQM: Engineering Qualification Models	Same as FM with Class K radiation tolerant die*, B or C level screening only
FM: Flight Models	Class K radiation tolerant die*, screening & Group A *unless specified otherwise

### Standard PIN CONFIGURATION





Pin Number	Function
1	No Connect
2	Ground (case)
3	Output
4	Supply V (Vcc)

## How To ORDER

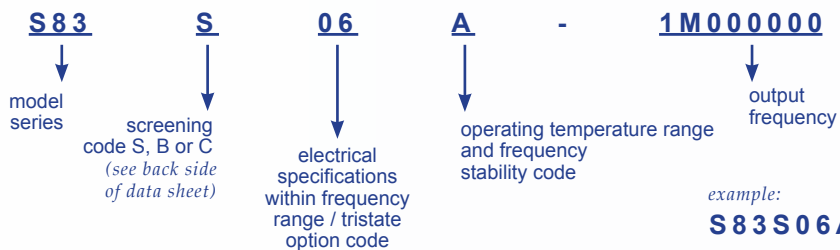

MIL-STD-790 Certified  
 QPL per MIL-PRF-55310  
 ISO 9001:2015  
 Pb-free RoHS Certified

## Mechanical SPECIFICATIONS

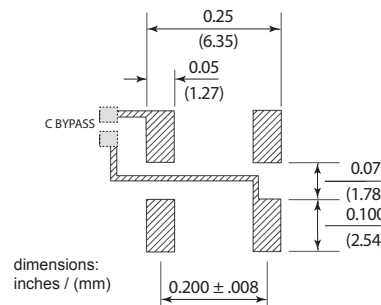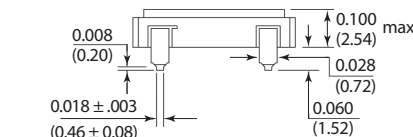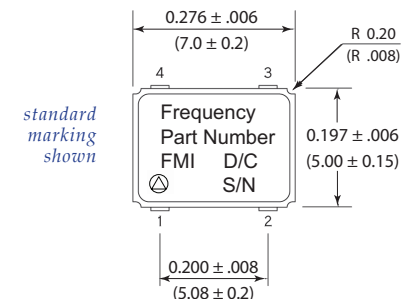

Leads are integral to the ceramic header. They are **not** added on to the package in a post manufacturing process.

Pad 1, ESD Symbol

Note: An external bypass capacitor 0.01 µF is required between Vdd and ground.



**FREQUENCY MANAGEMENT | International**  
 15302 Bolsa Chica Street  
 Huntington Beach, CA 92649

[FrequencyManagement.com](http://FrequencyManagement.com)

Ph. 714 373 8100  
 Fx. 714 373 8700  
 Sales@FrequencyManagment.com



5x7 mm Ceramic SMD for Space, Please Inquire!

New 5x3.2 Radiation Tolerant Oscillator for Space, Please Inquire!

Please request our General Specification for Class S Oscillators Document # QP1100100

Screening- S, B & C LEVELS (per FMI General Specification for Class S Oscillators)			CODE		
Screening	Method	Level:	S	B	C
Non-Destruct Bond Pull	MIL-STD-883, Method 2023		•	•	•
Internal Visual	MIL-STD-883, Method 2017, Class K; Method 2032		•		
	MIL-STD-883, Method 2017, Class H; Method 2032			•	•
Stabilization (Vacuum) Bake	MIL-STD-883, Method 1008, Condition C, 150°C, 48 hours min		•		
	MIL-STD-883, Method 1008, Condition C, 150°C, 24 hours min			•	•
Temperature Cycling	MIL-STD-883, Method 1010, Condition B, 10 Cycles		•	•	
Constant Acceleration	MIL-STD-883, Method 2001, Condition A (Y1 only, 5000 g's)		•	•	
PIND Test	MIL-STD-883, Method 2020, Condition B, 5 passes max		•		
Seal: Fine Leak	MIL-STD-883, Method 1014, Condition A1		•		
	MIL-STD-202, Method 112, Condition C, 111A			•	
Seal: Gross Leak	MIL-STD-202, Method 112, Condition D		•	•	•
Electrical Test	Functional Test Only at +23°C		•	•	•
Marking & Serialization	MIL-STD-1285		•	•	•
Electrical Test	Nominal Vcc & Extremes and Nominal Temp and Extremes		•	•	
Burn-in (load)	+125°C, Nominal Supply Voltage and Burn-in load, 160 hours min		•	•	
Burn-in (no-load)	+125°C, Nominal Supply Voltage and Burn-in load, 48 hours min				•
Interim Electrical	Functional Test Only		•		
Burn-in (load)	+125°C, Nominal Supply Voltage and Burn-in load, 160 hours min		•		
Final Electrical Test			•	•	•
	a) Input current, output frequency, output waveform, are tested at +23°C ±2°C				
	b) Frequency stability is tested over the specified temperature range; at both extremes and at +25°C at a minimum of 5 temperature increments note: Recording of test data is by lot # and then serial #				
Radiography	MIL-STD-883, Method 2012		•		
Frequency Aging	MIL-PRF-55310, +70°C Condition		•		
Frequency/Temperature Stability	MIL-PRF-55310, Over temperature extremes, 20 points equally spaced		•		
External Visual & Mechanical	MIL-STD-883, Method 2009		•	•	•

note: other options, screening levels and custom test plans available.

MIL-STD-790 Certified  
QPL per MIL-PRF-55310  
ISO 9001:2015  
Pb-free RoHS Certified

### Military Reference Specifications

MIL-PRF-55310 Oscillators, Crystal Controlled, General Specification For  
MIL-PRF-38534 Hybrid Microcircuits, General Specification For  
MIL-STD-202 Test Method Standard, Electronic and Electrical Components  
MIL-STD-883 Test Methods and Procedures for Microelectronics  
MIL-STD-1686 Electrostatic Discharge Control Program for Protection of Electrical and Electronic Parts, Assemblies and Equipment

### Options Available for FLIGHT MODELS

- Screening, Groups A, B, C, & D per MIL-PRF-38534 (QCI or Qualification)
- Screening, Groups A, B & C per MIL-PRF-55310
- Data Packages
- Swept Quartz Crystals
- Single Lot Date Code
- Source Inspection
- HiRes Photography

### Environmental COMPLIANCE

Environmental	Specification	Method	Condition	
Vibration – Sine	MIL-STD-202	Method 204	Condition D	20g, 10 to 2 KHz
Vibration – Random	MIL-STD-202	Method 214	Condition 1	30g rms, 10 to 2 KHz Random
Shock	MIL-STD-202	Method 213	Condition I	100g, 6 ms, F:1500, 0.5 ms
Seal Test	MIL-STD-883	Method 1014	Condition A1	Fine Leak
Seal Test	MIL-STD-883	Method 1014	Condition C1	Gross Leak
Temperature Cycling	MIL-STD-883	Method 1010	Condition B	10 Cycles Minimum
Constant Acceleration	MIL-STD-883	Method 2001	Condition A	5000g, Y1 Axis
Thermal Shock	MIL-STD-202	Method 107	Condition B	

continued...

Environmental	Specification	Method	Condition
Ambient Pressure	MIL-STD-202	Method 105	Condition C
Resistance to Soldering Heat	MIL-STD-202	Method 210	Condition C
Moisture Resistance	MIL-STD-202	Method 106	with 7B Sub-cycle
Salt Atmosphere (corrosion)	MIL-STD-883	Method 1009	Condition A (24 hrs)
Terminal Strength	MIL-STD-202	Method 211	Test Condition D
Solderability	MIL-STD-883	Method 2003	
Resistance to Solvents	MIL-STD-202	Method 215	

### Materials

1. Package Materials:  
Ceramic, Alumina 90% min
2. Pad Plating Material:  
Gold Plate 0.3 µm (12 µ inch)  
over 2 µm (80 µ inch) min. Nickel

### Products for Space Applications

Contact us for assistance with your specification. We will provide you with the technical support and the required documentation.

Issue2\_07122019



**FREQUENCY MANAGEMENT | International**  
15302 Bolsa Chica Street  
Huntington Beach, CA 92649

[FrequencyManagement.com](http://FrequencyManagement.com)

Ph. 714 373 8100  
Fx. 714 373 8700  
[Sales@FrequencyManagement.com](mailto:Sales@FrequencyManagement.com)