


FMOC18 SERIES

5.0 Vdc Clock Oscillators

8 PIN DIP

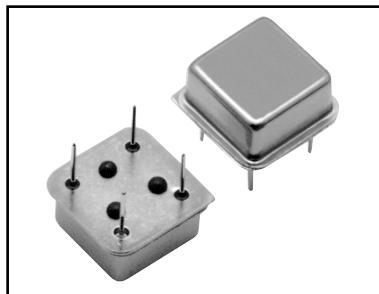

SPECIFICATIONS

08 - Issue 2 - 041508



RoHS
compliant


Parameter	Specification
Frequency Range	500.0 kHz to 160.0 MHz
Overall Frequency Tolerance	± 20 ppm to ± 100 ppm (Inclusive of Operating Temp., Supply Voltage, & Load)
Operating Temperature Range	0 to +70°C Std. (See Temp. Range Options)
Storage Temperature	-55 to +125°C
Supply Voltage (Vdd)	+5.0 Vdc (± 0.5 Vdc)
Supply Current (Icc)	20 mA max. @ 500.0 kHz to 23.9 MHz 40 mA max. @ 24.0 to 49.9 MHz 50 mA max. @ 50.0 to 85.0 MHz 90 mA max. @ 86.0 to 160.0 MHz
Symmetry (Duty Cycle)	40/60% Std., 45/55% Avail. (See Spec. Option S)
Output "0" Level (VOL)	0.4 Vdc max. (TTL) 0.5 Vdc max. (HCMOS)
Output "1" Level (VOH)	2.4 Vdc min. (TTL) 4.5 Vdc min. (HCMOS)
Rise and Fall Time	10 ns max. < 5 ns typical
Jitter	Absolute: ± 100 pSec Max One Sigma: ± 25 pSec Max
Start Time	10 ms max. < 5 ms typical
Output Load	10 TTL / 50 pF HCMOS (up to 24.0 MHz) 10 TTL / 15 pF HCMOS
Pin 1 Options (See Spec. Option T below)	No Connect (Std.) Tri-State (option T) VIH: 2.2 V or Open Enables Output VIL: 0.8 V Disables Output
Output Disable/Enable Time:	100 nS max.
Aging @ 25°C	± 5 ppm max first year

All specifications subject to change without notice.

STANDARD MARKING

XXX.XXXM
XXXXXX
• FMI YYWW

XXX.XXXM FREQUENCY in MHz
XXXXXX Part Number
Pin 1 Symbol, FMI, Date Code

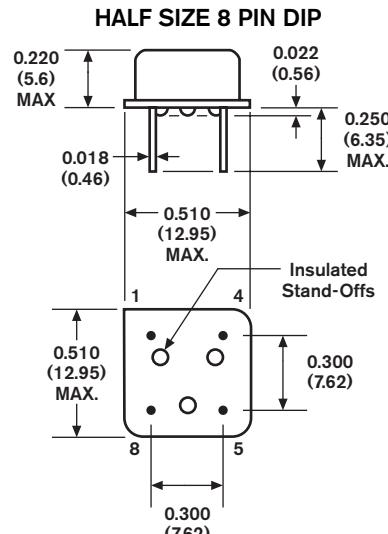

PIN FUNCTION TABLE

Pin	Function
1	NC or Tri-State
4	Case Ground
5	Output
8	Supply Voltage (Vdd)

Standard Specifications for product indicated in color

Dimensions: Inches
(mm)

PART DESCRIPTION SYSTEM

FMOC18 00 A S/T - XX.XXXXXXM - CM

