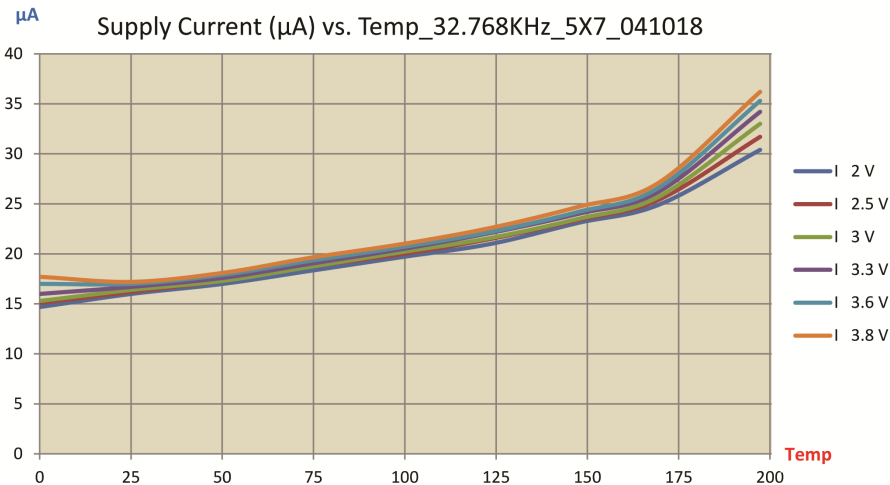



model HLP7506-32K768
High Temperature, Low-power 5x7 mm SMD Crystal OSCILLATOR

ELECTRICAL SPECIFICATIONS	PARAMETER
OUTPUT FREQUENCY	32.768 KHz
SUPPLY VOLTAGE RANGE	1.8 TO 3.8 V
OPERATING TEMPERATURE RANGE	-55°C to +200°C
FREQUENCY STABILITY OVER TEMPERATURE	±180 ppm, 0°C to +200°C
OUTPUT LOGIC	CMOS, 15 pF load
SUPPLY CURRENT (3.3V & at +25°C)	20 µA (<10 µA in disabled mode)
SUPPLY CURRENT (3.3V & at +200°C)	40 µA (<10 µA in disabled mode)
OSCILLATOR ENABLE	Open or Logic "1"
STORAGE TEMPERATURE	+225°C
OPERATIONAL LIFE	1000 Hours at +200°C min

Lower Current Options Available—Please Inquire


**High Temperature — Oscillator Specification
Low Power, SMD 5x7 mm, 32.768 KHz Clock**
MECHANICAL SPECIFICATIONS

Dimensions: mm Issue 7

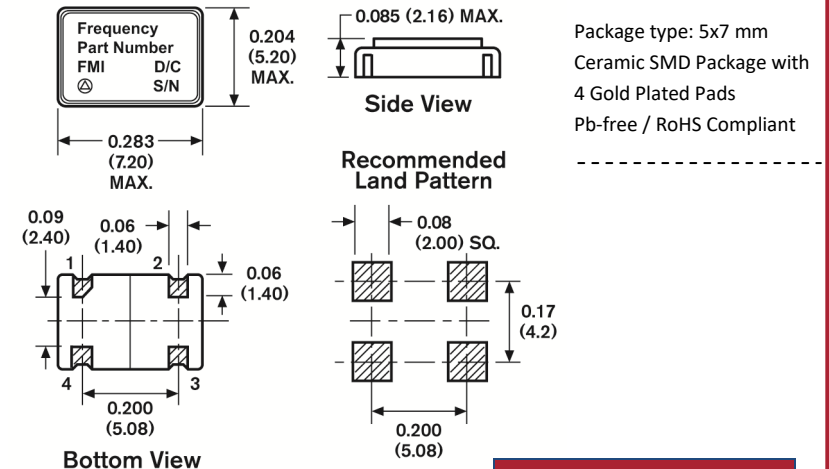

Package type: 5x7 mm
Ceramic SMD Package with
4 Gold Plated Pads
Pb-free / RoHS Compliant

MARKING

Line 1	FMI, Part Number
Line 2	Date Code & S/N
Line 3	Pin 1 ID, ESD ID

PAD CONFIGURATION

Pad 1	Output Enable
Pad 2	Ground
Pad 3	Output
Pad 4	Supply V (Vcc)

